






1. Pull off a small piece of floss

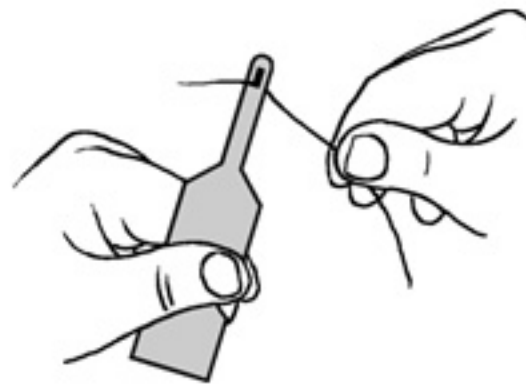


2. Insert one end of the floss through the small hole at the tip of the flossFish and pull it through.

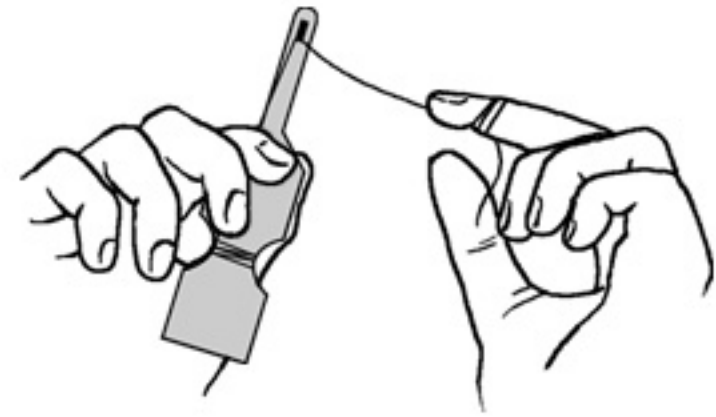

3. Take the other end and wrap it around the curved part of the flossFish, then pull the slack in the floss tight.

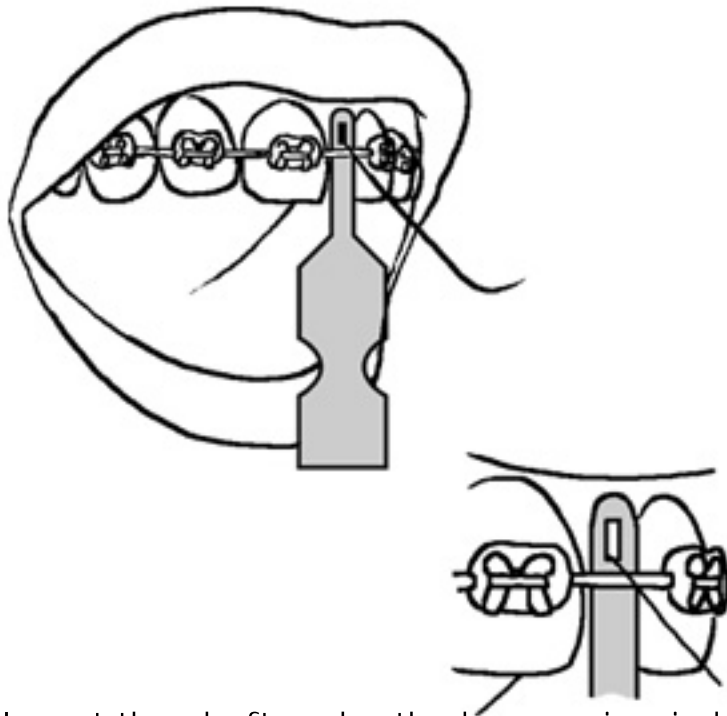

4. Insert the shaft under the brace wire, in between each bracket. Work the shaft and the floss carefully to remove plaque between your teeth as you would flossing normally.

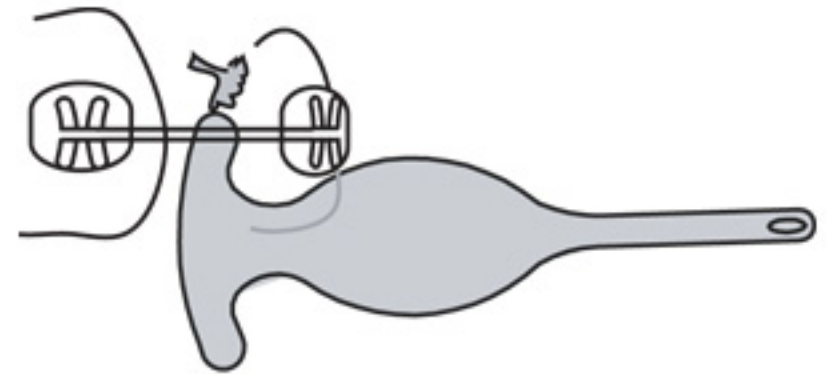

A feature of the new design allows you to use the tail of the flossFish to push food from under your wire after meals.